

INSTALLATION INSTRUCTIONS

OFFSET 2-HOLE STRAP HANGER

SIZING CHART

PART NO.	DESCRIPTION
S012A	OFFSETS 3/4" CPVC PIPING 1 1/2" FROM WOOD STUD
S016A	OFFSETS 1" CPVC PIPING 1 1/2" FROM WOOD STUD
S020A	OFFSETS 1 1/4" CPVC PIPING 1 1/2" FROM WOOD STUD
S024A	OFFSETS 1 1/2" CPVC PIPING 1 1/2" FROM WOOD STUD
S032A	OFFSETS 2" CPVC PIPING 1 1/2" FROM WOOD STUD

COMPLIES WITH STATIC LOAD REQUIREMENTS OF NFPA13 (1996 EDITION)

FOR MOUNTING CPVC PIPE TO STRUCTURAL WOOD OR COMPOSITE WOOD JOISTS WITH A MINIMUM 3/8" WEB THICKNESS


1. SNAP STRAP OVER CPVC PIPE.



3. FASTEN THE STRAP TO THE WOOD SURFACE USING THE TWO SCREWS PROVIDED. (#10 X 1" 5/16" HEX HEAD CAP SCREWS)



2. SQUEEZE STRAP BACK AROUND PIPE. (NOTE: PIPE MUST BE ALLOWED TO SLIDE FREELY)

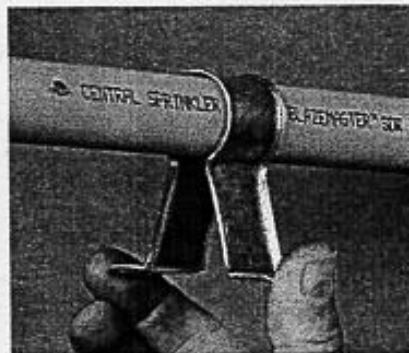

WARNING:

- Caddy® Fasteners that are manufactured using spring steel components may be used only in a non-corrosive indoor environment. Only non-spring steel fasteners that have protective coatings may be used otherwise, as specified.
- Fasteners must be used only in the manner depicted in the illustrations that accompany it and must not exceed static load ratings noted.
- Fasteners are designed for use with a variety of industry standard building materials, structural shapes, and mechanical components. For the fastener to work properly, these items must meet the appropriate industry standards. (Examples: ANSI, AISC, AISI)
- The buyer and/or installer is responsible for:
 - Application in conformance to local codes.
 - The integrity of structures to which the fasteners is attached, including their capability of safely accepting the loads imposed, as evaluated by a qualified engineer.
 - Using appropriate industry standard hardware as noted above.
- Failure to observe these specifications may cause product malfunction resulting in property damage or bodily injury. ERICO Products at the time of shipment are warranted to conform to any applicable written description furnished to the Buyer by ERICO, and to be free from defects in material and workmanship. NO OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, (INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS), SHALL EXIST IN CONNECTION WITH THE SALE OR USE OF ANY ERICO PRODUCT.

SAFETY INSTRUCTIONS: All safety regulations required by the job site must be observed. Special attention should be given to the following instructions. While working on or on the job site:

- Observe all Federal and local safety regulations.
- Wear safety glasses with side shields.
- Be aware of personnel working above and below.
- Wear a hard hat.
- Wear gloves to avoid splinters and cuts.
- When working above ground level, be sure the structure will support your weight.

ERICO®

©1999 ERICO, INC.

CFS264B

PRINTED IN U.S.A.



ERICO, Fastening Products
34600 SOLON RD
SOLON, OHIO 44139
Customer Service: (800) 853-0878
FAX: (800) 462-4797
Technical Support:
(800) 25-CADDY (252-2339)