


LANSDALE

VALVE & MANUFACTURING


www.Breccocorp.com

TEST & DRAIN VALVE

Female NPT Inlet and Outlet.
 Rated 300 PSI. Forged Brass Body.
 Chrome Plated Brass Ball with Teflon Seats.

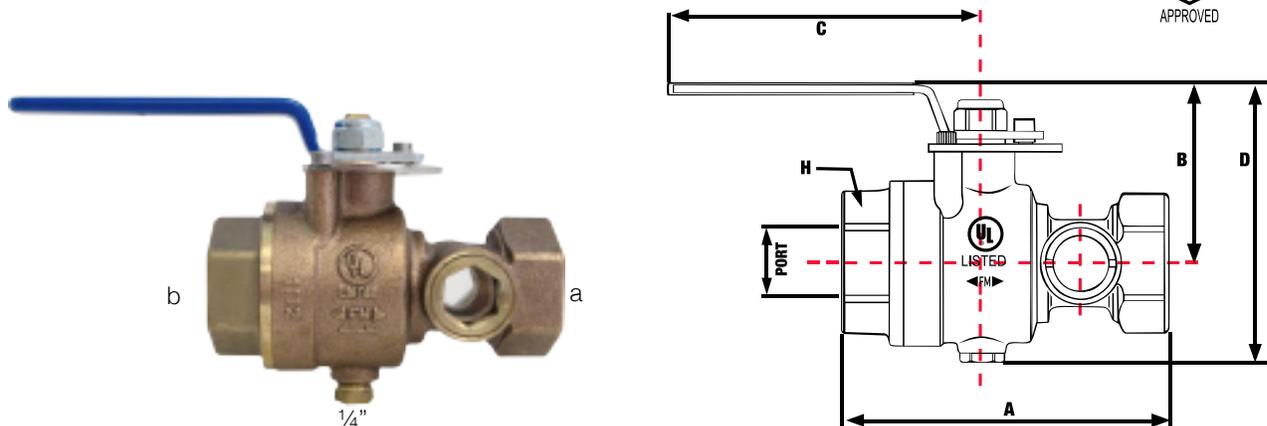

UL and FM Listed Under	a/b (Orifice)	C (Plug)	Port	A	B	C	D	H
LANSDALE INTERNATIONAL	1" (1/2")	1/4"	1 1/16"	5 1/32"	2 43/64"	5 11/32"	4 27/64"	2"
	1-1/4" (1/2")	1/4"	1 1/16"	5 1/32"	2 43/64"	5 11/32"	4 27/64"	2"
	1-1/2" (1/2")	NA	1 3/4"	6.811"	5"	6.1811"	5"	3"
	2" (1/2")	NA	1 3/4"	6.811"	5"	6.1811"	5"	3"

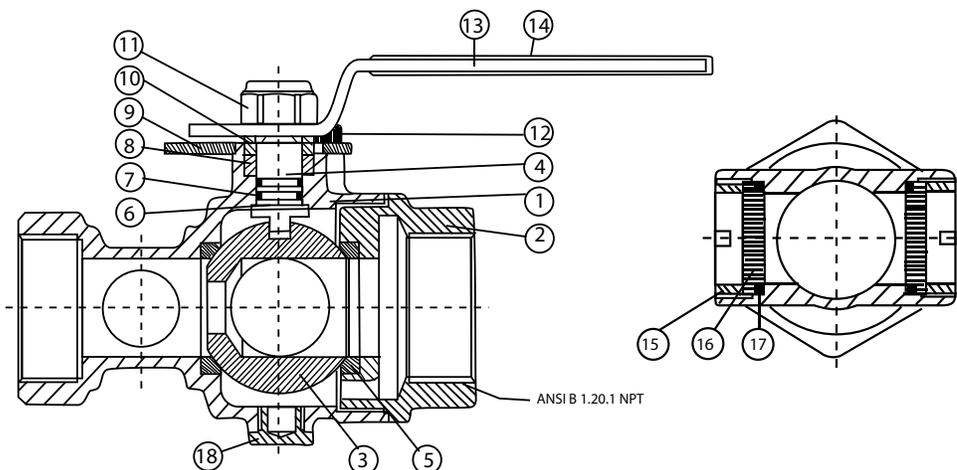

No	Part	Material ASTM	Qty
1	Body	Bronze B62	1
2	Body Cap	Forged Brass C37700	1
3	Ball	Brass B16/C37700	1
4	Stem	Brass B16	1
5	Seat	PTFE	2
6	Thrust Washer	PTFE	1
7	O-Ring	NBR D2000	2
8	Gland Packing	PTFE	1
9	Indicator Plate	Steel	1
10	Gland	Brass B16	1
11	Nut	Steel	1
12	Stop Screw	Stainless Steel	2
13	Lever	Steel	1
14	Handle Cover	PVC Vinyl	1
15	Retaining Ring	Brass B16	2
16	Washer	Acrylic	2
17	O-Ring	NBR D2000	2
18	Cap Plug	Brass B16	1

PROJECT INFORMATION	APPROVAL STAMP
Project:	<input type="checkbox"/> Appr oved
Address:	<input type="checkbox"/> Appr oved as noted
Cont ractor:	<input type="checkbox"/> Not appr oved
Engineer:	Remarks:
Submittal Data:	
Notes 1:	
Notes 2:	